

PVC-Gasket,
transparent

Hexagon nut G1/2 SW36 with
2x M4 female thread for

anti-rotation

G1/2

150

200

100

60

300

70

Ø52

8

7

6

5

4

3

2

1

F

E

D

C

B

A

Media

MM



Potable water

03




Non-potable water

06

Max. bench thickness: 50 mm

Bench drilling: Ø21+1 mm

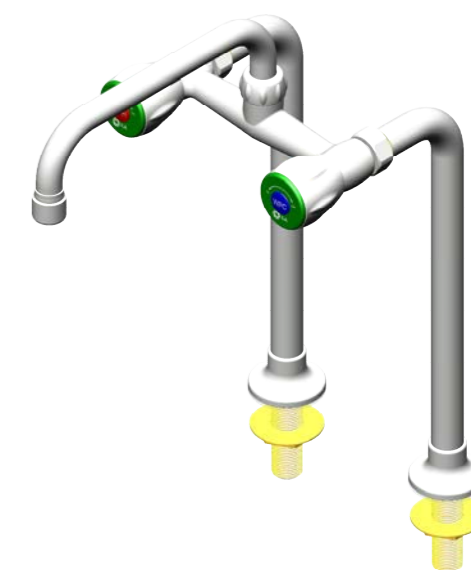

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM

WEIGHT: 2331.30g

	DATE	NAME
CREATED	09.05.2023	C. Vowinkel
CHECKED	09.05.2023	C. Vowinkel
RELEASED	09.05.2023	C. Vowinkel

THIS DRAWING IS PROPERTY OF ILA GMBH, IT CAN NOT BE PUBLISHED OR COMMUNICATED WITHOUT CONSENT OF ILA GMBH

DESCRIPTION

Bench mounted two column mixing tap in brass for water. Inlet connection: 70mm shanks with G½ male thread. Height: 300mm. U-Swivel spout with 200mm stand out and M22x1 aerator. Total stand out of 300mm. Molded nylon handle with media indication according to EN 13792. Rubber compression control headwork, 2 x 360°. RAL 7035 powder coated finish.

DRAWING NUMBER.

11.4300.41MM.0320

A3



SCALE: 1:3



PAGE: 1 / 1

INDEX	CHANGE	DATE	NAME

8

7

6

5

4

3

2

1