


Media		MM
	Potable water, hot	02
	Potable water, cold	03
	Spring water	04
	Non-potable water, hot	05
	Non-potable water, cold	06

Max. bench thickness: 50 mm
 Bench drilling: $\varnothing 21+1$ mm

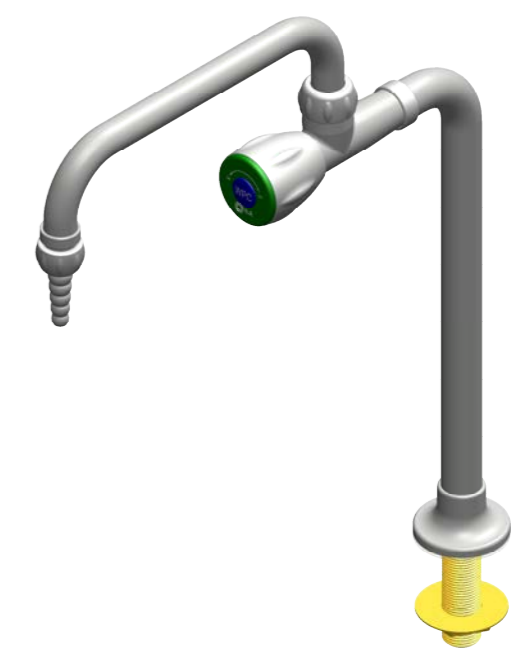

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM				WEIGHT: 1102.44g		THIS DRAWING IS PROPERTY OF ILA GMBH, IT CAN NOT BE PUBLISHED OR COMMUNICATED WITHOUT CONSENT OF ILA GMBH	
				DATE	NAME	DESCRIPTION	
				31.05.2023	D.Kheradvar	Bench mounted single turret valve for water. Inlet connection: 70mm shank with G1/2 male thread. Height: 300mm. Stand out of 200mm. Removable plastic hose nozzle. Molded nylon handle with media indication according to EN 13792. Rubber compression control headwork, 2 x 360°. RAL 7035 powder coated finish	
				CHECKED		DRAWING NUMBER.	
				RELEASED		13.6000.20MM.0300	
						A3	
INDEX	CHANGE	DATE	NAME			SCALE: 1 : 3	PAGE: 1 / 1