




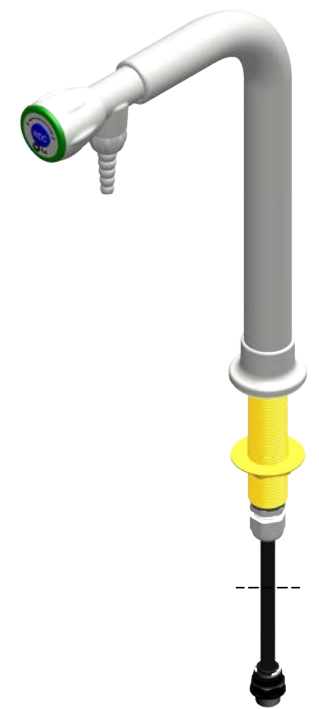
PVC-Gasket,
transparent

Hexagon nut G3/4 SW36
with 2x M4 female thread for anti-rotation

PE-Hose \varnothing 10x1,5

Media	MM
 Deionised water, hot	15
 Deionised water, cold	16
 Distilled water	19

Max. bench thickness: 80 mm
Bench drilling: \varnothing 27+1 mm



UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM

WEIGHT: 1024.688g

	DATE	NAME
CREATED	09.05.2023	C. Vowinkel
CHECKED	09.05.2023	C. Vowinkel
RELEASED	09.05.2023	C. Vowinkel

THIS DRAWING IS PROPERTY OF ILA GMBH, IT CAN NOT BE PUBLISHED OR COMMUNICATED WITHOUT CONSENT OF ILA GMBH

DESCRIPTION
Bench mounted PVDF-Valve on a brass column with inner plastic tubing for special water. Inlet connection: \varnothing 10x800mm PE hose with G3/8 male connection. Height: 300mm. Stand out of 150mm. Molded nylon handle with media indication according to EN 13792. Ceramic disc cartridge, 90°. RAL 7035, powder coated finish for brass column.



DRAWING NUMBER.
14.1080.00MM.1300

A3

SCALE: 1:3

PAGE: 1 / 1

INDEX	CHANGE	DATE	NAME