


Media		MM
	Potable water	03
	Non-potable water	06

Max. bench thickness: 50 mm  
 Bench drilling:  $\phi 21+1$  mm

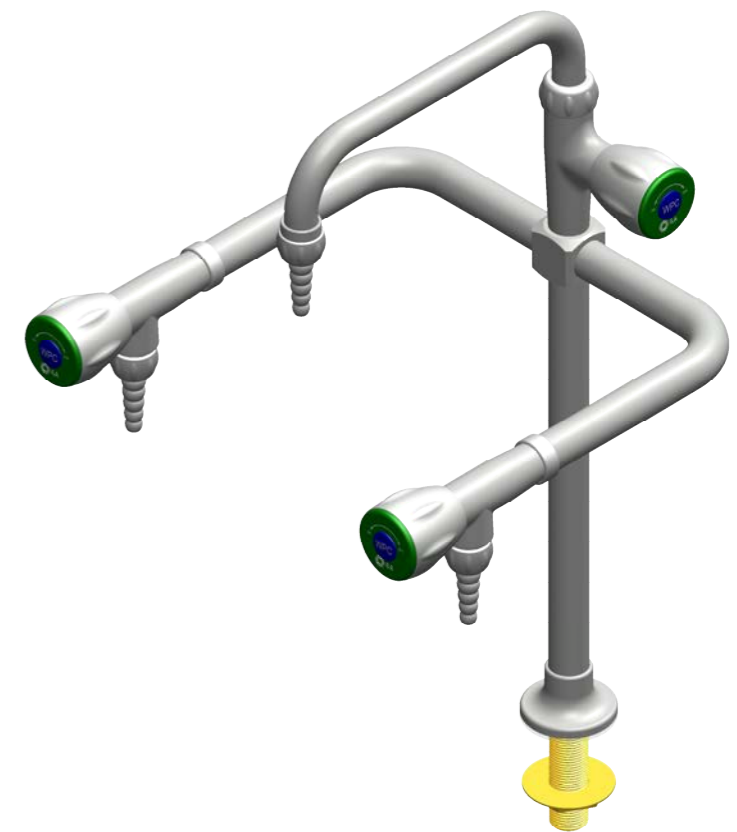

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM

WEIGHT: 2467.27g

DATE: 03.07.2023  
 NAME: D.Kheradvar

CHECKED:  
 RELEASED:

THIS DRAWING IS PROPERTY OF ILA GMBH, IT CAN NOT BE PUBLISHED OR COMMUNICATED WITHOUT CONSENT OF ILA GMBH

DESCRIPTION  
 Bench mounted U-shaped two way valve and one valve with U-swivel spout on a column for water. Inlet connection: 70mm shank with G $\frac{1}{2}$  male thread. Height: 300mm. 200mm stand out of each valve and swivel spout. Removable plastic hose nozzle. Molded nylon handle with media indication according to EN 13792. Rubber compression control headwork, 2 x 360°. RAL 7035 powder coated finish.

DRAWING NUMBER:  
 14.6000.20MM.0620

A3



SCALE: 1 : 3

PAGE: 1 / 1

INDEX	CHANGE	DATE	NAME